

**FUJIPLA**®

**Let's LAMIPACK IT!**

- For large posters, displays
- For menu cards, pop, placards
- For catalogues, documents
- For teaching materials, large printing



*Fuji Lamipacker®  
LPE6510*

*Fuji Lamipacker®  
LPE3510*

Fujipla will change the existing way of business and education...

**Get ready in one second:**

Warm-up time is minimized

**Simple and precise:**

Foolproof mechanism that everyone can handle

**Flexible and versatile:**

Roll film lamination widens size adaptability



Hot LAMINATOR  
*Fuji Lamipacker®*


**LPE3510**

A3 size  
max. width  
**350mm**

Hot LAMINATOR  
*Fuji Lamipacker®*

**LPE6510**

A1 size  
max. width  
**650mm**

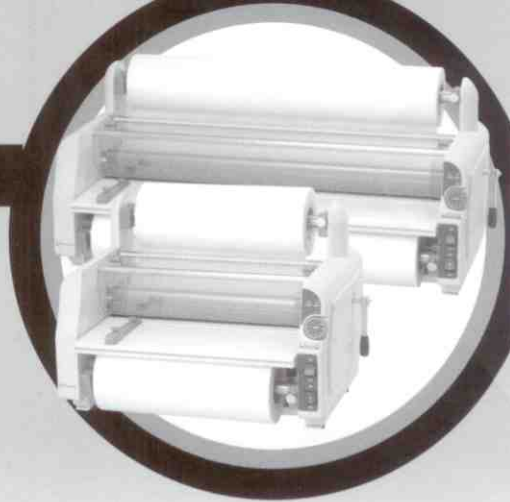

## Standard Model for Beginners

Hot LAMINATOR

# LPE3510

max. width  
**350**mm

**A3**  
size

# LPE6510

max. width  
**650**mm

**A1**  
size

Fujipla will change the existing way of business and education...

### Features

- Warm-up time is much shorter than the conventional lamipackers.
- Light weight, compact size
- Easy setting: Dial setting is introduced for temperature setting. Film tension adjustment is also simple and easy.
- By using attachment, 1 inch and 2-1/4 inch core sizes are adaptable
- By using thinner film, you can save on running costs.

### Specifications

Model	LPE3510	LPE6510
Max. laminating width	350mm(A3)	650mm(A1)
Max. film thickness	125 mic.	
Laminating speed	1.3m/min.	0.84m/min.
Temperature range	90 - 140 °C	
Power consumption	800W	1400W
Power supply	AC 220-240V(50/60Hz)	
Dimensions	550(W)x390(D)x395(H)mm	850(W)x390(D)x395(H)mm
Weight	22.5kg	28.0kg
JAN(EAN)Code	4514015200356	4514015200363
Attachment	Film Setting Board	

\*Specifications may be modified without prior notice.

### Effects of lamination

- As a result of lamination, the efficiency of the durability and water resistance is improved and the laminated object is protected from scratches, stains and water.
- As lamination seals up the object completely, it prevents colors from fading.
- Laminated documents are completely falsification free.
- The printing gets more vivid as lamination process makes surface of the laminated object flat and smooth.

### Laminating Film

- It is recommended to use our original roll film. Mismatching of film characteristics may lead to problems such as jamming or imperfect lamination.
- By choosing our lamination film, it is possible to obtain not only waterproof effect but also UV cut or anti-static effect.

### Safety Precautions

- Please read instruction manual thoroughly before operation to avoid danger to yourself and failure in the lamination process.
- Should any of the following symptoms occur, unplug the Lamipacker and contact your Fujipla dealer.
  - The power cord or plug gets unusually hot.
  - A strange smell or smoke comes out of the machine.
  - Water or a foreign substance gets inside the machine.
- Warning and caution labels are omitted on the photos in this catalogue.
- Specifications or appearance of the product may change for improvement reasons without notice.
- Parts for maintenance service are available for a minimum of 5 years after cessation of the manufacture of product.